


SPARK ARRESTORS

SPARK ARRESTOR APPROVED
UNDER USDA FOREST
SERVICE STANDARD 5100-1a

As indicated by this symbol
▼ embossed on all unit shells.

NOTE:
INLET IS SLOTTED END

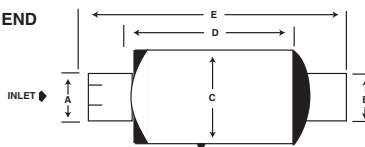

- Tested and U.S. Forest Service approved for vertical or horizontal installations.
- All Spark arrestors 95% or greater efficiency on incendiary sparks - reduces fire hazard.
- Centrifugal force separates solids from exhaust gas.
- Aluminized construction with stainless steel critical parts.

Part No.	Body Diameter	Inlet and Outlet Diameter	Body Length	Overall Length
35807	4¼	1½ ID - 1½ ID	3⅞	6
21578	5⅝	2 ID - 2 ID	6⅝	11
21579	5⅝	2½ ID - 2½ ID	8⅝	12⅞
21580	6⅝	3 ID - 3⅝ OD	10⅞	14⅞
21581	7⅝	3½ ID - 3⅝ OD	12	17⅝
21582	8½	4 ID - 4⅝ OD	14⅝	21⅞
21584	9⅝	5 ID - 5⅝ OD	16	24
22774	10⅝	6 ID - 6 ID	13¼	23

SELECTING A SPARK ARRESTOR

Eight models of different sizes and capacities are currently being produced. Generally, if a spark arrester will fit on the exhaust pipe of an engine, it will also have acceptable back pressure for that engine. In some cases, a larger size spark arrester will be required to stay within back pressure limits and in those cases, adapters will have to be used.